

1230ES

MAST LIFT



Performance

Platform Height – Elevated	3.66 m
Platform Capacity	230 kg
Lift/Lower Time	12/12 seconds
Maximum Drive Height	Fully Elevated
Weight	
Indoor Use Only Model*	790 kg
Outdoor Use Model*	1,070 kg
Drive Speed–Elevated	0.8 km/h
Drive Speed–Lowered	4.8 km/h
Gradeability	25%
Turning Radius (Inside)	0.13 m
Turning Radius (Outside)	1.46 m

*Certain options will increase weight.

Standard Specifications

Power Source

Charger	20 Amp Automatic (120V/240V – 50/60 HZ)
Batteries	4 x 6V 220 amp-hr
Drive	24V Electric, 6kW

Tyres

- Tyre Size/Type (Non-Marking) 318 x 100 Solid

Brakes

- Electric, Friction (On Drive Wheels)

Hydraulic System

- Capacity 7.1 L

Standard Features

- Industry leading duty cycles
- Controls and electrical system common with ES Series scissor lift
- Joystick with fully proportional lift and drive
- All-steel platform deck and rails
- Saloon-style entry gate
- Corner tool tray
- Automatic traction control
- Steel swing-out battery doors with heavy duty hinges
- Mechanical Pothole Protection System
- All motion alarm
- Tilt alarm and light
- Battery condition indicator
- Horn
- Flashing amber beacon
- Hourmeter
- Powder paint coating
- Lanyard attachment points
- Integrated lifting and tie-down points
- Machine can be lifted by forks from either side
- Pressure check port
- Saloon-style swing gate for ease of entry and exit



Accessories & Options

- 220 Amp-Hour AGM Batteries
- MDI (Ground)




1230ES

MAST LIFT



Dimensions

All dimensions are approximate.

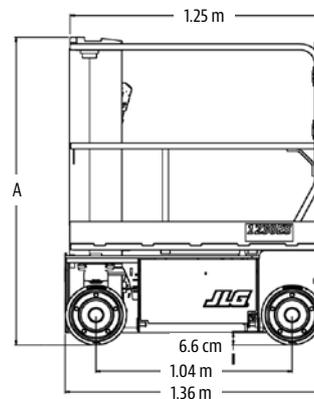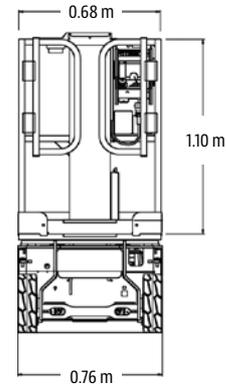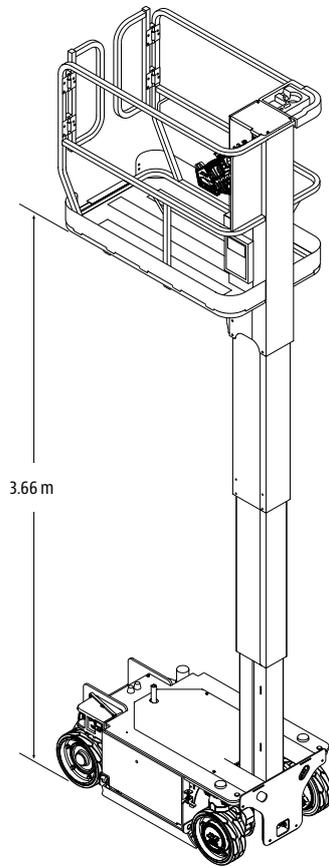

A. Overall Height	
Indoor Rated Only Unit	1.66 m
Outdoor Rated Unit	1.75 m



The JLG "1 & 5" Warranty

JLG Industries, Inc. backs its products with its exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds AS/NZS 1418.10 2011 as originally manufactured for intended applications.

JLG Industries (Australia)

358 Park Road
Regents Park, NSW 2143
Telephone 02 8718 6300
Fax 02 8718 6377

www.jlg.com.au

An Oshkosh Corporation Company